Data Express® DE75

APPLICATIONS:

- PCI RAID
- Software RAID
- Drive Swapping
- Drive Transporting
- Security
- Backup
- Testing
- Audio/Video Editing

DE75 FEATURES

Available in Beige and Black

DE75 receiving frame fits in any standard 5.25" HH bay

The DE75 Also Accommodates Undersized or Custom Bays

Rugged Steel-Constructed Drive Enclosure

Data *Express*

- **For 3.5" Low Profile SAS/SATA 3Gb/s, SCSI, SATA or PATA Drives***
- **Accommodates Undersized or Custom Storage Bays**
- **Supports SAS/SATA 3Gb/s, Ultra ATA/133, SATA and Ultra160 SCSI**
- **Hot Swappable**

Features	Benefits
Rugged Construction	Helps Protect Drive from Physical Damage
Hot Swappability	Allows Drive Carrier to be Removed While the System is Powered Up
"Soft Start" Circuitry	Eliminates Current In-Rush/Assures Data Integrity
Downward Compatible	Utilize Earlier Technology Hard Drives

*Hard Drive Sold Separately

Data Express DE75

DE 75 SAS/SATA 3Gb/s

Part Number	Description
6456-7100-0000	DE75, Complete Assembly, SAS/SATA 3Gb/s, RoHS, Beige
6456-7100-0500	DE75, Complete Assembly, SAS/SATA 3Gb/s, RoHS, Black

DE 75 SATA 1.5Gb/s

Part Number	Description
6056-5000-0500	Complete Assembly, SATA 1.5 Gb/s, Black
6057-5000-0500	Carrier Only, SATA 1.5 Gb/s, Black

DE 75 ATA/133

Part Number	Description
6056-0000-0000	Complete Assembly, ATA/133, Beige
6056-0000-0500	Complete Assembly, ATA/133, Black
6057-0000-0000	Carrier Only, ATA/133, Beige
6057-0000-0500	Carrier Only, ATA/133, Black

DE 75 68-PIN U160

Part Number	Description
6056-1000-0000	Complete Assembly, 68-pin, U160, Beige
6056-1000-0500	Complete Assembly, 68-pin, U160, Black
6057-1000-0000	Carrier Only, 68-pin, U160, Beige
6057-1000-0500	Carrier Only, 68-pin, U160, Black

DE 75 80-pin U160

Part Number	Description
6056-2000-0500	Complete Assembly, 80-pin, U160, Black
6057-2000-0500	Carrier Only, 80-pin, U160, Black

For DE75 frame part numbers please see our website at www.CRU-DataPort.com

Specifications:

- Key lock/power on-off
- Hot swappable with host Support (SATA 1.5Gb/s, SAS/SATA 3Gb/s & SCSI models)
- "Soft Start" circuitry & anti-static device protection
- Highly-rated mating connectors support up to 25,000 insertions
- Cableless drive connector (SATA 1.5Gb/s, SAS/SATA 3Gb/s & SCSI models)
- Connector alignment pins (68-pin, ATA/133, SATA 1.5Gb/s & SAS/SATA 3Gb/s)
- LED indicator
- Highly-rated mating connector(s)
- Mounting hardware included
- 5 year warranty
- Available in Beige or Black

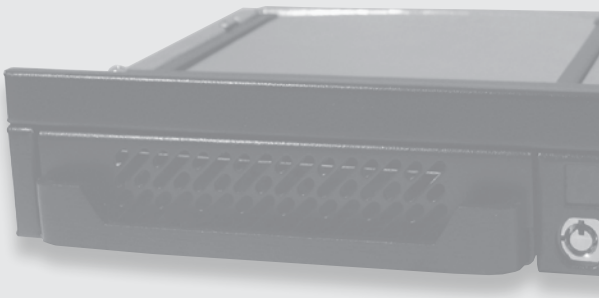

- Mating connectors support up to 25K insertions (2K on 80-pin models)
- DE75 PATA drive carriers can be used with DE75 Universal SATA receiving frames, allowing earlier-technology PATA drives to continue to be used with a SATA system

Design:

- Dimensions - 5.75" W x 8.15" L x 1.65" H (inches)
- Weight 3.00 lbs.

*Dimensions are for reference only

"CRU", "DataPort", "Data Express", "Rugged, Reliable, Mobile, Secure" and the CRU-DataPort logo are trademarks of CRU Acquisition Group, LLC.
© Copyright 2009 - ALL RIGHTS RESERVED. All Products and specifications are subject to change without notice.